

Non e' permesso cedere, o terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modes.

Copyright of this document and giving it to others and the use or communication of the contents hereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Werbung sowie Verwertung dieser Unterlagen, Vervielfältigung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich anders bestimmt. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte hier den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED. SEE DOCUMENT :
EINBAUINWEISE FUER KABEL SIND ZU BEACHTEN. SIEHE DOKUMENT :
IL FAUT OBSERVER LES INDICATIONS POUR L'INSTALLATION DES CABLES. VOIR DOCUMENT :
SONO DA OSSERVARE GLI INDICAZIONI DI MONTAGGIO DEI CAVI. VEDERE DOCUMENTO :

449 000 000 0 / 011

RESISTANT TO : AIR, WATER, MINERAL OIL, PETROL, DIESELOIL, SALTSPRAY
BESTAENDIG GEGEN : LUFT, WASSER, MINERALOEL, BENZIN, DIESELOEL, SALZSPRUEHNEL
RESISTANT A : AIR. EAU, HUILE MINERALE, ESSENCE, GASOIL, BROUILLARD SALIN
RESISTENTE A : ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) : A: IP 68 / IP 6K9K
SCHUTZART (IN VERBINDUNG MIT STECKER) : B: IP 6K6K / IP 6K9K / IP 6K7
DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE) : ISO 20653
GRADO DI PROTEZIONE (IN RELAZIONE CON SPINA) :

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH : -40° C +80° C
GAMME D'APPLICATION THERMIQUE :
CAMPO TERMICO D'APPLICAZIONE :

FIELD OF APPLICATION : TRAILER
EINSATZBEREICH : ANHAENGER
DOMAINE D'APPLICATION : REMORQUE
CAMPO DI APPLICAZIONE : RIMORCHIO

SURFACE PROTECTION : Sn 2
OBERFLAECHENSCHUTZ :
PROTECTION DE SURFACE :
PROTEZIONE SUPERFICI : Ag 1

CABLE :
LEITUNG : PUR
CABLE : 2x 0.35mm²
CAVO :



A CABLE COMPLY WITH
ADR GUIDELINE FOR WIRING

CONNECTOR PLUG
KUPPLUNGSSTECKER
CONNECTEUR MALE
CONNETTORE

PIECE NO.
TEILENUMMER
NO. DE PIECE
NO. DELLA PARTE

DATE OF MANUFACTURE
HERSTELLDATUM
DATE DE FABRICATION
DATA DI FABRCAZIONE

SOCKET A
GERAETESTECKDOSE B
PRISE DE COURANT
PRESA DI CORRENTE

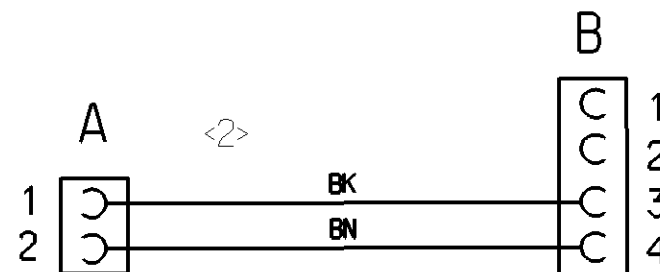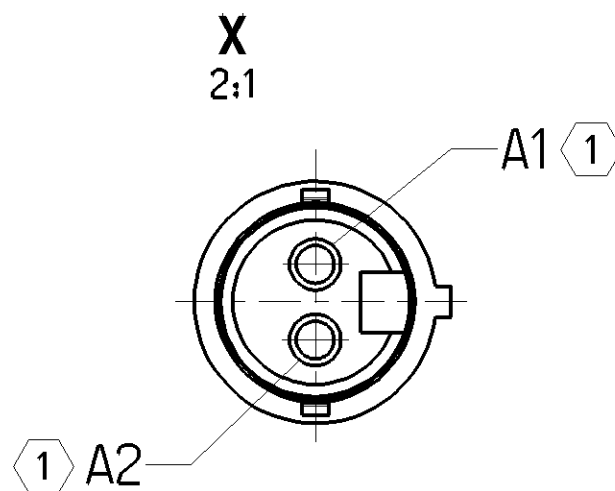

CHAMBER IN: KAMMER IN: A CHAMBRE EN: CAMERA IN:	CROSS SECTION QUERSCHNITT SECTION DE TRANSVERSALE SEZIONE TRASVERSAL	WIRE COLOUR ADER FARBE FIL COLEURE FILO COLORE	CHAMBER IN: KAMMER IN: B CHAMBRE EN: CAMERA IN:	CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA
	NOT CONNECTED NICHT BELEGT NE PAS CONNECTE(E) NON COLLEGATO(TA)		1	PART NO TEILE NR. NO. DE PIECE CODICE
	NOT CONNECTED NICHT BELEGT NE PAS CONNECTE(E) NON COLLEGATO(TA)		2	EXAMPLE BEISPIEL EEMPLE ESEMPIO
1	0.35mm ²	BLACK SCHWARZ NOIR NERO	3	MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA
2	0.35mm ²	BROWN BRAUN BRUN BRUNO	4	TOLERANCES TOLERANZEN TOLERANCES TOLERANZA

General Specification: JED-334-1, Size ISO 14405 LP		Copyright WABCO®		WABCO	
Further Technical Data:		Date	Signature	CABLE WITH PLUG / SOCKET KABEL MIT STECKER / DOSE CABLE AVEC FICHE / SOCLE CAVO CON CONNETTORE	
Doc. Code		Sheet	To		
General Tolerances JED-261		2018-05-22	Drawn Rakiuki		
Range of Nominal Dimensions (± mm)		2018-05-23	Checked Drosner		
Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°
Fine	0.5	1.0	1.5	2.0	
Medium	1.0	2.0	3.0	4.0	
Coarse	2.0	3.5	5.0	6.5	
Tapped Holes acc.		Mass	Scale	Material No.	
1) Tolerance Class Applied Crossmarked		/	1:1	449 733 000 0	
		Size	CAD System	Date of first issue: 2016-11-08	
		A 2	CREO	Doc.Code Language Sheet	
				053 ML 1/1	
		ECN-No.	Revision	Techn. Resp.	
		174123	2x A	6390_EM	
				Replacement for	
				884 008 511 0	