
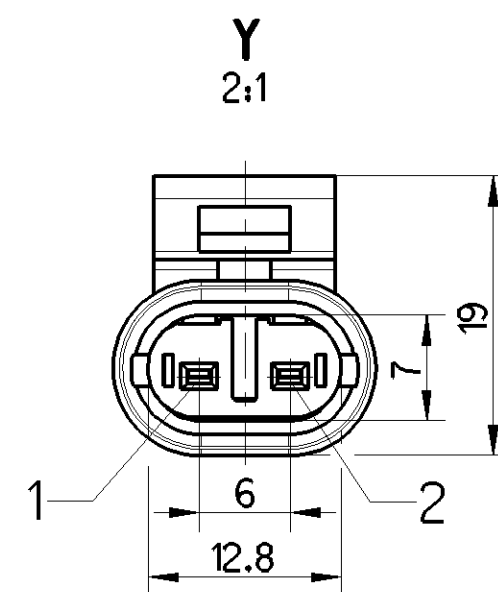
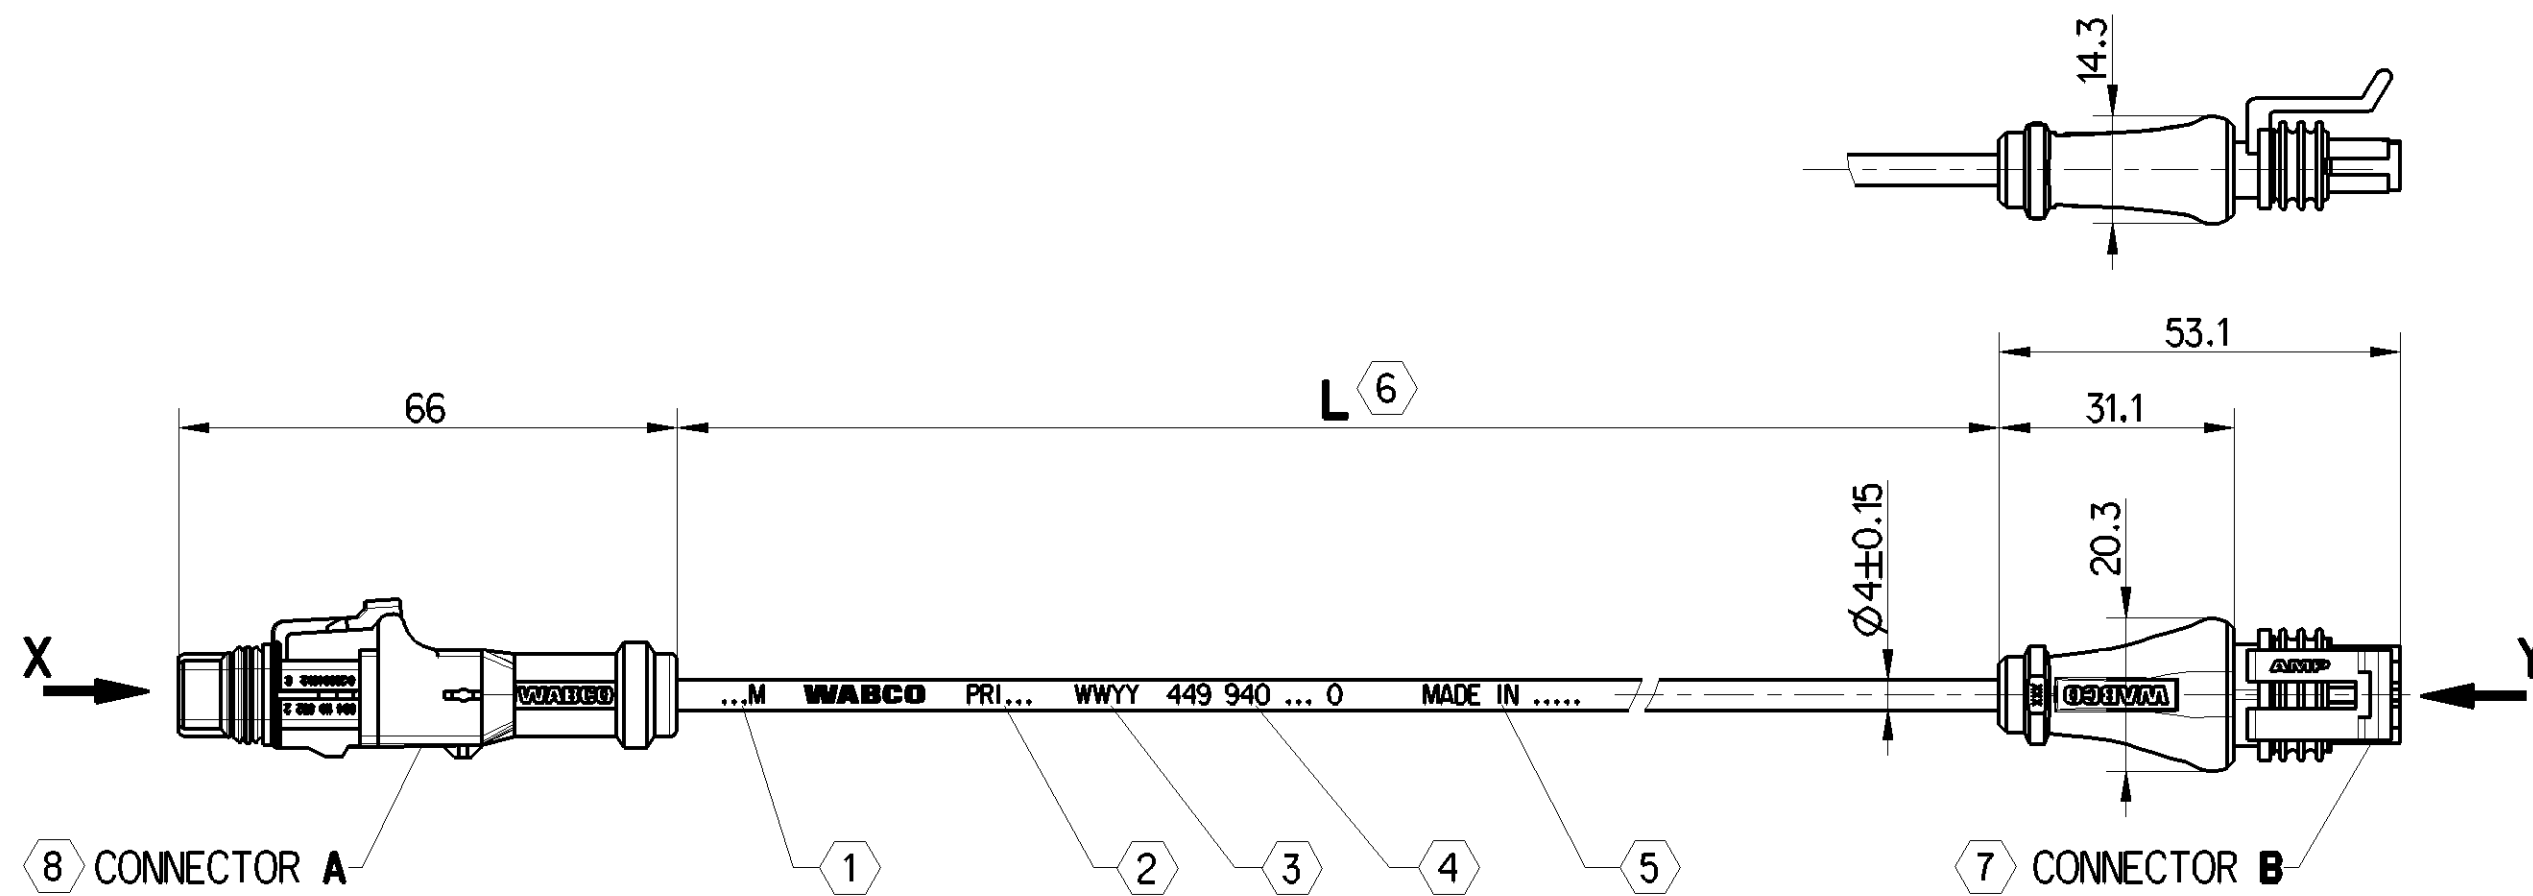


Non e' permesso cedere, o terzi o riprodurre questo documento, ne utilizzare il contenuto a renderlo comunque noto o terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.


Tout communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modes.

Wskazanie swego wykorzystania tego dokumentu, jego reprodukcja, wykorzystanie jego zawartosci, jak i wykorzystanie do innych celow, bez wyrazonego zezwolenia, stanowi naruszenie praw autorskich i innych praw. Wskazanie swego wykorzystania tego dokumentu, jego reprodukcja, wykorzystanie jego zawartosci, jak i wykorzystanie do innych celow, bez wyrazonego zezwolenia, stanowi naruszenie praw autorskich i innych praw.

Alle Rechte fuer den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

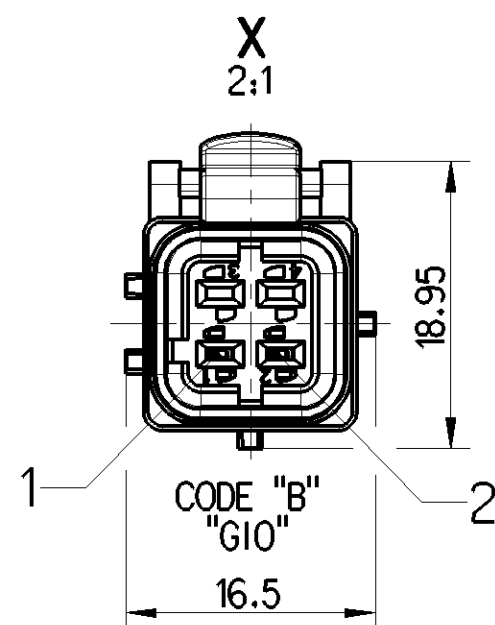

- 1 CABLE LENGTH
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 2 MANUFACTURER IDENTIFICATION
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 3 DATE OF MANUFACTURE
WABCO IDENTIFICATION NUMBER 449 940 XXX 0
- 4 IDENTIFICATION OF COUNTRY OF ORIGIN
PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE
- 5 DEGREE OF PROTECTION (IN CONNECTION WITH PLUG):
CONNECTOR A: IP 6K6K / IP 6K9K / IP 6K7
CONNECTOR B: IP 6K7 (ISO 20653)

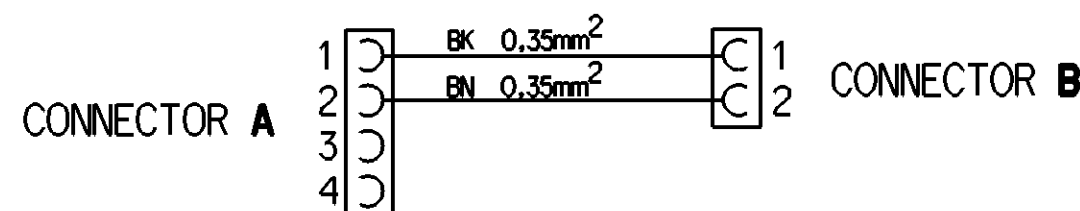

THERMAL RANGE OF APPLICATION: -40°C ... +80°C

CABLE COMPLY WITH ADR GUIDELINE FOR WIRING

CONTACTS' SURFACE PROTECTION:
CONNECTOR A, B: Sn

CABLE: PUR 2x0,35 mm²

MOUNTED CABLE RESISTANT TO:
AIR, WATER, MINERAL OIL, DIESELOIL, SALTSpray

INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED.
SEE DOCUMENT: 449 000 000 0 / 011

FIELD OF APPLICATION: TRAILER

8 MATING DEVICE CONNECTION, INSTALLATION INSTRUCTIONS AND
FURTHER TECHNICAL DATA - SEE SYSTEM SPEC. OF MODULATOR

7 2 POS. AMP SUPERSEAL CONNECTOR

COLOUR CODING
FOR WIRES:
BK - BLACK
BU - BLUE
BN - BROWN
GN - GREEN
RD - RED
WH - WHITE
YE - YELLOW
VT - VIOLET
PK - PINK

6	CODE OF LENGTH
PART NO	L[m] 449 940 □□.□ 0
EXAMPLE	L = 10m 449 940 100 0
MIN/MAX LENGTH	L _{min} = 0,2m L _{max} = 20m
TOLERANCES	L ≤ 10m ± 0,050m L > 10m ± 0,075m

General Specification: JED-334-1, Size ISO 14405 LP				Copyright WABCO®			
Further Technical Data:				Date	Signature		
Doc. Code:				Drawn	Osinski		
Sheet:				Checked	Grychowicz		
General Tolerances JED-261				Expert			
Range of Nominal Dimensions (± mm)				Overhage			
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		
Fine		0,5	1,0	1,5	2,0		
Medium	X	1,0	2,0	3,0	4,0	±3°	
Coarse		2,0	3,5	5,0	6,5		
Tapped Holes acc.				Mass	Scale	Material No.	
1) Tolerance Class Applied Crossmarked				/ KG	1:1 2:1	449 940 000 0	
				Size	CAD System	Date of first issue: 2020-06-11	
				A 2	CREO	Doc.Code Language Sheet	
						053 EN 1/1	
						ECN-No. Revision Techn. Resp. Replacement for	
						508341 5 x A 6930_WH	